

DIGITAL CALIPERS WITH INTERCHANGEABLE POINTS

DATA
OUTPUT



short spherical/flat points (included)




Unit: mm

long spherical/flat points (included)




Unit: mm

short spherical blade points (included)



Unit: mm

long spherical blade points (included)



Unit: mm

- Non waterproof
- Supplied with 4 pairs of points and zero setting block for external measurement
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel
- Optional accessory: points (code 1526-T101, 7392, 7391, 7381, 7321), depth stop (code 6143)

With data interface


Code	Wireless transmitter (optional)
1124-300A	7315-25 (receiver is needed)

Built-in wireless


Code	Receiver (optional)
1124-300AWL	code 7315-2/3/6/7/8/9



1124-300A

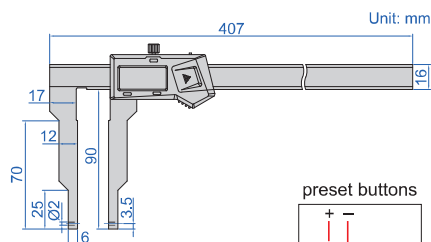


preset buttons




zero setting block for
external measurement
(included)



measure internal and
external grooves

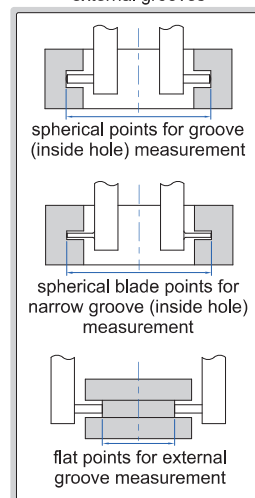

install points






Point	Range	Accuracy	Application
short spherical/flat points	24-324mm/1-12.7" (internal) 0-288mm/0-11.3" (external)	±0.04mm	spherical points for grooves inside hole (small hole) flat points for external grooves
long spherical/flat points	40-340mm/1.5-13.3" (internal) 0-272mm/0-10.7" (external)	±0.04mm	spherical points for grooves inside hole (large hole) flat points for external grooves
short spherical blade points	24-324mm/1-12.7" (internal) 0-288mm/0-11.3" (external)	±0.04mm	for narrow grooves inside hole (small hole)
long spherical blade points	40-340mm/1.5-13.3" (internal) 0-272mm/0-10.7" (external)	±0.04mm	for narrow grooves inside hole (large hole)

Depth stop (optional)

Code
6143



6143




Point sleeve (optional)


Code
1526-T101



1526-T101



Unit: mm

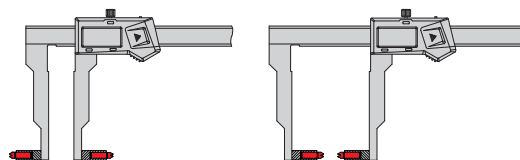

working with multifunctional points,
ball points and screw thread points

Ball points (optional)

Code	Ball dia. (D)
7391-T2 *	SØ1.5mm
7391-T3 *	SØ2.0mm
7391-T4 *	SØ2.5mm
7391-T5 *	SØ3.0mm
7391-T6 *	SØ3.5mm
7391-T7 *	SØ4.0mm
7391-T8 *	SØ4.5mm
7391-T9 *	SØ5.0mm
7391-T10 *	SØ6.0mm

* It is necessary to use point sleeve (code 1526-T101) for these points

Measuring range **

internal	external
78-369mm/3.1-14.5"	0-234mm/0-9.2"

** Range of 1124-300A and 1124-300AWL after installing the ball points



7391-T5



Unit: mm

Measuring range **


internal	external
67-367mm/2.6-14.4"	0-255mm/0-10"

** Range of 1124-300A and 1124-300AWL after installing the multifunctional points

Multifunctional points (optional)

Code	Type
7392-T1 *	flat
7392-T2 *	spherical
7392-T3 *	spline
7392-T4 *	disk
7392-T5 *	blade
7392-T6 *	knife-edge
7392-T7 *	point
7392-T8 *	knife-edge
7392-T9 *	point

* It is necessary to use point sleeve (code 1526-T101) for these points

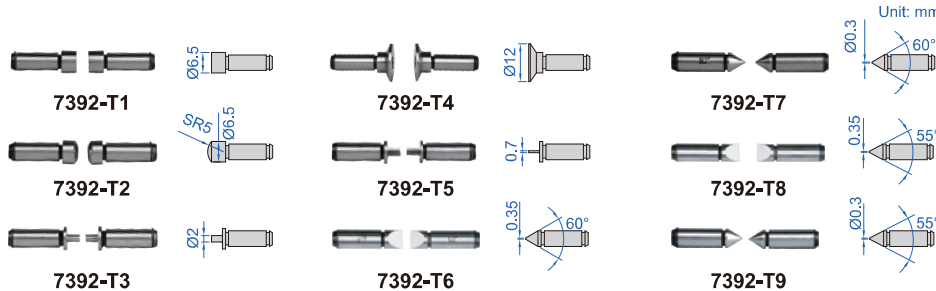

Measuring range **

internal	external
67-367mm/2.6-14.4"	0-255mm/0-10"

** Range of 1124-300A and 1124-300AWL after installing the screw thread points


Screw thread points (optional)

Internal thread (60° thread angle)

Code	Pitch
7321-T11 *	0.4-0.5mm/64-48TPI
7321-T12 *	0.6-0.9mm/44-28TPI
7321-T13 *	1-1.75mm/24-14TPI
7321-T14 *	2-3mm/13-9TPI
7321-T15 *	3.5-5mm/8-5TPI
7321-T16 *	5.5-7mm/4.5-3.5TPI
7321-T1S *	6 pairs/set, including all above points

External thread (60° thread angle)

Code	Pitch
7381-T11 *	0.4-0.5mm/64-48TPI
7381-T12 *	0.6-0.9mm/44-28TPI
7381-T13 *	1-1.75mm/24-14TPI
7381-T14 *	2-3mm/13-9TPI
7381-T15 *	3.5-5mm/8-5TPI
7381-T16 *	5.5-7mm/4.5-3.5TPI
7381-TS *	6 pairs/set, including all above points

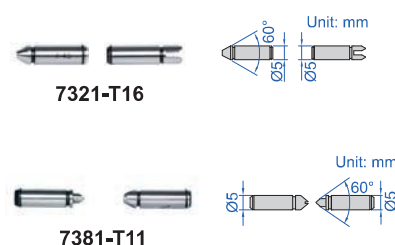

* It is necessary to use point sleeve (code 1526-T101) for these points