


BUILT-IN WIRELESS HANG SCALES

CAN BE CUSTOMIZED

- Wireless zero-setting, weighing, subtracting tare value, accumulation
- Peak (max.) and tracking mode
- Wireless transmission distance up to 100 meters
- LCD handheld display, remote control
- Built-in buzzer
- Overload alarm
- Automatic power off
- Unit: kg, N

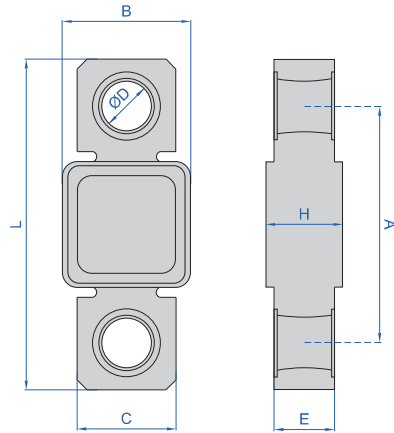

8207-3T



LCD remote controller (included)

SPECIFICATION

Stabilization time	8s
Material	alloy steel
Operation temperature	-10~55°C
Operation humidity	≤85%RH
Overload alarm	100%FS+9d
Maximum safe load	150%FS
Limited overload	300%FS
Power supply	3×1.5V AA batteries

Code	Dimension (mm)						
	L	B	C	H	E	A	ØD
8207-05T	204	99	46	50	30	158	26
8207-1T	204	99	46	50	30	158	26
8207-2T	204	99	46	50	30	158	26
8207-3T	204	99	46	54	30	158	26
8207-5T	222	99	60	58	35	162	31
8207-10T	268	104	80	62	49	192	41
8207-15T	304	110	92	66	58	212	46.5
8207-20T	344	120	120	66	66	232	56.5
8207-30T	394	132	132	73	73	264	66
8207-50T	500	150	150	100	100	340	80

Code	Weighing capacity		Minimal load		Readability (d)		Selectable resolution		Accuracy	
	mass values	force values	mass values	force values	mass values	force values	mass values	force values	mass values	force values
8207-05T	0.5t	5kN	4kg	40N	0.2kg	2N	0.1kg	1N	±0.2kg	±1%
8207-1T	1t	10kN	10kg	100N	0.5kg	5N	0.2kg	2N	±0.5kg	
8207-2T	2t	20kN	20kg	200N	1kg	10N	0.5kg	5N	±1kg	
8207-3T	3t	30kN	20kg	200N	1kg	10N	0.5kg	5N	±1.5kg	
8207-5T	5t	50kN	40kg	400N	2kg	20N	1kg	10N	±2kg	
8207-10T	10t	100kN	100kg	1kN	5kg	50N	2kg	20N	±5kg	
8207-15T	15t	150kN	100kg	1kN	5kg	50N	2kg	20N	±7.5kg	
8207-20T	20t	200kN	200kg	2kN	10kg	100N	5kg	50N	±10kg	
8207-30T	30t	300kN	200kg	2kN	10kg	100N	5kg	50N	±15kg	
8207-50T	50t	500kN	400kg	4kN	20kg	200N	10kg	100N	±20kg	

STANDARD DELIVERY

Main unit	1 pc
LCD remote controller	1 pc

OPTIONAL ACCESSORY

Hang scale pull rings	8290
-----------------------	------



hang scale pull rings (optional)