


PORTABLE TEMPERATURE DRY BLOCK CALIBRATORS (LOW TEMPERATURE TYPE)

- Used for temperature calibration in industrial or laboratory
- Multi-point temperature correction function
- Segmented PID control, one-button heating and cooling, full-automatic temperature control
- Refrigeration mode: thermoelectric cooling, antifreeze coolant
- RS232 communication interface is included

soaking block (included), can be customized

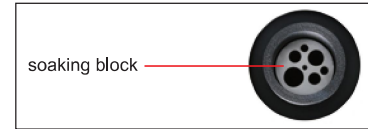

LBC-TS40

STANDARD DELIVERY

Main unit	1 pc
Soaking block	1 pc

SPECIFICATION

Code	LBC-TS40	LBC-TS30	LBC-TS20
Temperature range	-40°C~100°C	-30°C~150°C	-20°C~150°C
Temperature resolution	0.01°C		
Temperature fluctuation	±0.1°C		
Radial uniformity	±0.2°C		
Soaking block	insertion aperture: 4mm, 4mm, 6mm, 6mm, 8mm, 10mm can be customized		
Hole insertion depth	150mm		
Control method	4.2" touch screen		
Operating environment	temperature: 22°C±3°C, humidity: 15%RH~65%RH		
Power	500W		
Power supply	AC220V, 50/60Hz		
Dimension (L×W×H)	340×180×385mm		
Net weight	9.2kg		