

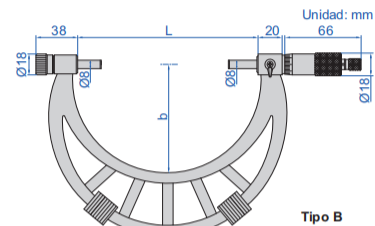





MICRÓMETROS EXTERIORES CON YUNQUES INTERCAMBIABLES

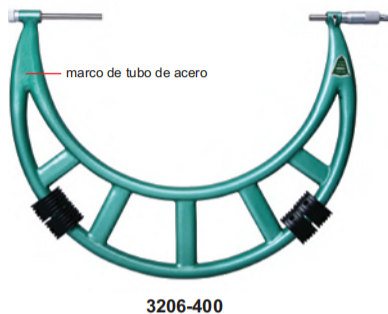

- Graduación: métrico 0.01mm
pulgadas 0.0001" (dentro de 12")
0.001" (más de 12")
- Tope de trinquete
- Cumple con DIN863-3
- Caras de medición de carburo
- Suministrado con normas de ajuste



Métrico

(mm)

Código	Rango	Tipo	Precisión	L	b	Patrones de ajuste
3206-150A	0-150mm	A	6µm	158	82	25, 50, 75, 100, 125
3206-200A	100-200mm	A	7µm	208	114	100, 125, 150, 175
3206-300A	150-300mm	A	9µm	308	165	150, 175, 200, 225, 250, 275
3206-301A	200-300mm	A	9µm	308	165	200, 225, 250, 275
3206-400	300-400mm	B	11µm	409	224	325, 375
3206-500	400-500mm	B	13µm	509	275	425, 475
3206-600	500-600mm	B	14µm	609	321	525, 575

Pulgadas

Código	Rango	Tipo	Precisión	L	b	Patrones de ajuste
3206-6	0-6"	A	0.00025"	6.220"	3.228"	1", 2", 3", 4", 5"
3206-8	4-8"	A	0.00030"	8.189"	4.488"	4", 5", 6", 7"
3206-12	6-12"	A	0.00035"	12.126"	6.496"	6", 7", 8", 9", 10", 11"
3206-121	8-12"	A	0.00035"	12.126"	6.496"	8", 9", 10", 11"
3206-16	12-16"	B	0.00045"	16.102"	8.819"	13", 15"
3206-20	16-20"	B	0.00050"	20.039"	10.827"	17", 19"
3206-24	20-24"	B	0.00055"	23.976"	12.638"	21", 23"