


## LLAVES DINAMOMÉTRICAS

**ATENCIÓN: EN SENTIDO HORARIO SOLAMENTE**

- Según normas DIN ISO 6789, ASME B107.300
- Construcción totalmente metálica, robusta y duradera

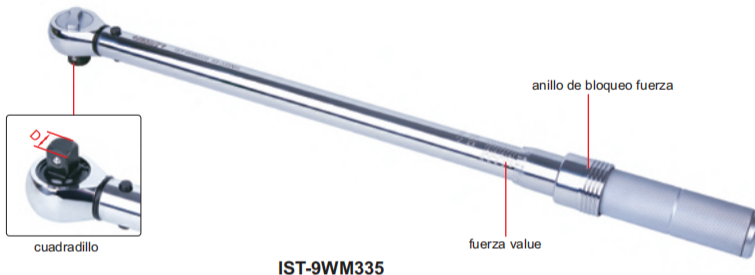

IST-9WM335

### ESPECIFICACIÓN

Código	IST-9WM30	IST-9WM60	IST-9WM100	IST-9WM200	IST-9WM335	IST-9WM500	IST-9WM800	IST-9WM1000
Rango (sentido horario)	6~30N.m	10~60N.m	20~100N.m	40~200N.m	65~335N.m	100~500N.m	160~800N.m	200~1000N.m
Precisión	±6% (<10N.m) ±4% (≥10N.m)	±4%	±4%	±4%	±4%	±4%	±4%	±4%
Graduación	0.2N.m	0.25N.m	0.5N.m	1N.m	1N.m	2.5N.m	4N.m	5N.m
Cuadradillo (D)	3/8"	3/8"	1/2"	1/2"	1/2"	3/4"	3/4"	3/4"
Longitud	318mm	388mm	443mm	468mm	528mm	855mm	1055mm	1055mm
Peso	820g	960g	1040g	1160g	1300g	5000g	5900g	5900g