

BLUETOOTH

DATA  
OUTPUT**INSPECTION  
CERTIFICATE**

## PORTABLE LEEB HARDNESS TESTERS



**HDT-CB320**  
(wired probe is included)



**HDT-WL320**  
(wireless probe is included)

- Can use wired probes or wireless probes
- Dual-coil probe for high accuracy
- Universal testing angle, no need to set impact direction
- Based on Leeb (HLD), converted to Vickers (HV), Brinell (HB), Rockwell (HRC, HRA and HRB), Shore (HS) and tensile strength ( $\sigma_b$ )
- Dual value display, shows both Leeb and converted hardness
- Large 2.4" LCD display with backlight
- With a magnet on the back, the main unit can be attached on steel surfaces
- According to ASTM A956 and DIN 50156

connect to PC, upload the data to PC, print and send to Excel (software is included)



connect to  
bluetooth printer (**optional**)



### SPECIFICATION

Code	HDT-CB320	HDT-WL320	
Probe included	wired probe D	wireless probe D	
Optional probes	wired (DC/C/D/D+15/DL/E/G), wireless (DC/C/D/DL/G)		
Resolution	1HLD/1HV/1HB/0.1HRC/0.1HRB/0.1HRA/0.1HS/1MPa		
Accuracy	±6HLD (when HLD=800)		
Output	USB		
Measuring range	HL 170-960, 7-89HRA, 13-109HRB, 17-70HRC, 20-655HB, 32-99.5HS, 80-940HV, 255-2639N/mm <sup>2</sup>		
Applicable materials	1. steel/cast steel      2. alloy steel      3. stainless steel      4. grey cast iron 5. nodular cast iron    6. cast aluminum    7. brass                8. bronze 9. copper                 10. forging steel    11. rolling steel		
Statistics	average/max./min./s.value		
Memory	999 data		
Working environment	-10°C~45°C		
Power supply	2×AA batteries		
Dimension (L×W×H)	145×68×28mm		
Net weight	158g		



hardness test block D (included)




small support ring (included)


### STANDARD DELIVERY

Code	HDT-CB320	HDT-WL320
Main unit	1 pc	1 pc
Wired probe D	1 pc	—
Wireless probe D	—	1 pc
Hardness test block D	1 pc	1 pc
Small support ring	1 pc	1 pc
Cleaning brush	1 pc	1 pc

wired probes (optional)

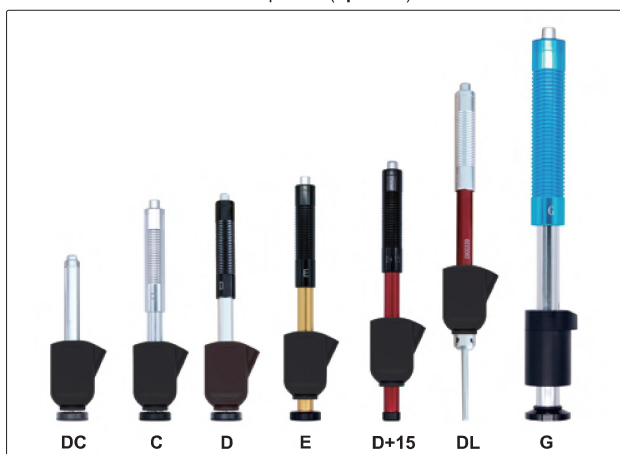

wireless probes (optional)

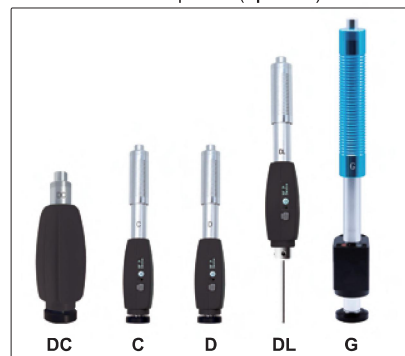

## OPTIONAL ACCESSORY

Wired probe	DC	HDT-CB320-DC
	C	HDT-CB320-C
	D	HDT-CB320-D
	D+15	HDT-CB320-D15
	DL	HDT-CB320-DL
	E	HDT-CB320-E
	G	HDT-CB320-G
Wireless probe	DC	HDT-WL320-DCW
	C	HDT-WL320-CW
	D	HDT-WL320-DW
	DL	HDT-WL320-DLW
	G	HDT-WL320-GW
Hardness test block D **		HDT-B-HLD3
Hardness test block G *		HDT-B-HLG2
Printer		ISH-LP200-PRINTER
Support rings		

\* Hardness test block G (HDT-B-HLG2) is for probe G (HDT-CB320-G or HDT-WL320-GW)

\*\* Hardness test block D (HDT-B-HLD3) is for all other probes

## APPLICABLE WORKPIECE

Probes	DC	C	D	D+15	DL	E	G
Application	inner wall of small space	small or thin workpiece, coating layer	general use	deep groove	narrow slot or small hole	very hard material	casting or forging workpiece
Maximum roughness of workpiece (Ra)	2µm	0.4µm	2µm	2µm	2µm	2µm	7µm
Minimum weight of workpiece	direct measurement	5kg	1.5kg	5kg	5kg	5kg	15kg
	on solid support	2.5kg	0.5kg	2kg	2kg	2kg	5kg
	coupled on plate	0.05-2kg	0.02kg	0.05-2kg	0.1kg	0.1kg	0.5kg
Minimum thickness of workpiece	3mm	1mm	3mm	3mm	3mm	3mm	10mm