


TORQUE TESTERS


ATTENTION: NOT SUITABLE FOR HIGH SPEED SHOCK TORQUE MEASUREMENT



- For testing electric, pneumatic and manual torque screwdrivers and torque wrenches and other torque tools
- Clockwise and counter-clockwise operation
- Peak and track working modes
- High-definition display, backlighting available
- High sampling frequency for accurate peak capture
- Unit: N.m, lb.in, kgf.cm
- Upper and lower limits can be set, automatic audible and visual alarm with red and green indicator lights and buzzer
- Store 10 sets of data and calculate the average value
- Serial RS232 output, connect to PC to view torque curves by test software
- Automatic zero setting, automatic shutdown

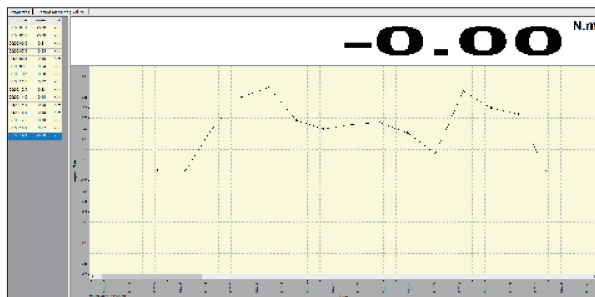

software (included)

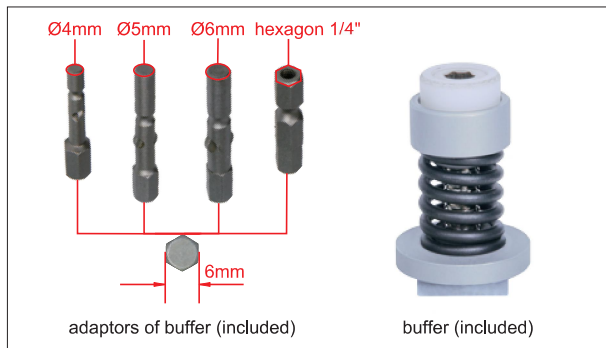


adaptors of buffer (included)

buffer (included)



buffer test example

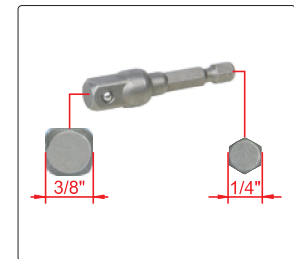

3/8" to 1/4" adaptor (included)



IST-HP1

SPECIFICATION

Code	IST-HP1	IST-HP2	IST-HP5	IST-HP10	IST-HP20
Range	0.1~1N.m	0.2~2N.m	0.5~5N.m	1~10N.m	2~20N.m
Resolution	0.0005N.m	0.001N.m	0.002N.m	0.005N.m	0.01N.m
Accuracy	±1% of indicated value				
Maximum test speed	3000rpm				
Number of memory	10 groups				
Power supply	built-in rechargeable battery				
Dimension	230×110×50mm				
Net weight	2.4kg				



printer (optional)

STANDARD DELIVERY

Main unit	1 pc
Buffer and adaptors	1 set
3/8" to 1/4" adaptor	1 set
Power adapter	1 pc
RS232 cable and software	1 set

OPTIONAL ACCESSORY

Printer	IST-HP-PRINTER
Transmission cable (keyboard signal)	7302-ISF-S*
Buffer	IST-CD-BF Series

*Output data in N.m units only



transmission cable (optional)